


EGI14-2T5HO

**LINEAR FLUORESCENT ENCLOSED AND GASKETED FIXTURE
4-FT., 2-LAMP T5HO**

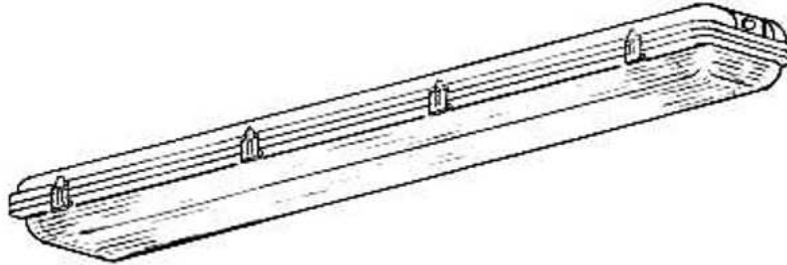

FIXTURE FEATURES

- Applications include general lamination, rough service commercial, industrial and retail installations. Ideal for any non-hazardous location application that requires a wet location fixture.
 - Diffuser is clear polycarbonate material with prismatic inner surface and smooth exterior surface for ease of cleaning
 - Housing is grey polycarbonate material
 - Silicon gasket between housing and diffuser
 - Stainless steel hinged clips hold diffuser to housing
 - Internal metal ballast/gear tray and reflector is white powder coated after fabrication
 - Rotary lock lamp holders for positive lamp contact
 - IP65 Rated
 - Quick disconnect is included for ease of installation.
 - Engineered for use with T5HO lamps

FIXTURE CONSTRUCTION

Fixture is a “made-for-purpose” enclosed and gasketed fixture (not a strip fixture installed in a housing) constructed of high impact, UV resistant, polycarbonate material.

FINISH

Any steel parts, except stainless steel latches, of the fixture are white powder coated after fabrication eliminating sharp unpainted edges and corners

BALLAST AND ELECTRICAL

Ballasts are 120-277 volt, energy efficient electronic, thermally protected, automatic resetting, class P, high power factor and sound rated A. Lamp holders are positive stop locking type

MOUNTING

Fixtures can be surface mounted, pendant mounted (with optional kit) or hung by cable or chain.

LISTING

ETL 3097700 listed, conforms to UL 1598. Certified to CSA C22.2 No. 250.0.

OPTIONAL ACCESSORIES

- Pendant mounting kit
- Aircraft type hanging cable